

## UNIVERSITI TEKNOLOGI MALAYSIA

### DECLARATION OF THESIS / UNDERGRADUATE PROJECT PAPER AND COPYRIGHT

Author's full name : NIK ZAINAB BINTI NIK AZIZAN

Date of birth : 23<sup>rd</sup> MARCH 1983

Title : BUILDING PERFORMANCE WITH DIFFERENT BEDROCK RESPONSE SPECTRUM

Academic Session : 2009/2010-2

I declare that this thesis is classified as :

**CONFIDENTIAL**

(Contains confidential information under the Official Secret Act 1972)\*

**RESTRICTED**

(Contains restricted information as specified by the organization where research was done)\*

**OPEN ACCESS**

I agree that my thesis to be published as online open access (full text)

I acknowledged that Universiti Teknologi Malaysia reserves the right as follows:

1. The thesis is the property of Universiti Teknologi Malaysia.
2. The Library of Universiti Teknologi Malaysia has the right to make copies for the purpose of research only.
3. The Library has the right to make copies of the thesis for academic exchange.

Certified by:



\_\_\_\_\_  
SIGNATURE

\_\_\_\_\_  
SIGNATURE OF SUPERVISOR

\_\_\_\_\_  
830323-03-5244  
(NEW IC NO. /PASSPORT NO.)

\_\_\_\_\_  
PROF DR. AZLAN ADNAN  
NAME OF SUPERVISOR

Date : 27<sup>th</sup> APRIL 2010

Date : 27<sup>th</sup> APRIL 2010

**NOTES :**        \*        If the thesis is CONFIDENTIAL or RESTRICTED, please attach with the letter from the organization with period and reasons for confidentiality or restriction.

“I hereby declare that I have read this thesis and in my opinion this thesis is sufficient in terms of scope and quality for the award of Master of Engineering (Civil-Structure)”.



Signature : .....  
Name : PROF. DR. AZLAN BIN ADNAN  
Date : 27<sup>th</sup> APRIL 2010

BUILDING PERFORMANCE WITH DIFFERENT BEDROCK RESPONSE  
SPECTRUM

NIK ZAINAB BINTI NIK AZIZAN

This report is submitted  
in partial fulfillment of the requirement for the award of the  
Master in Civil Engineering (Structure)

Faculty of Civil Engineering  
Universiti Teknologi Malaysia

APRIL 2010

I declare that this thesis entitled “*Building Performance With Different Bedrock Response Spectrum*” is the result of my own research expect as cited in the references. The thesis has not been accepted for any degree and is not concurrently submitted in candidature for any other degree.

Signature : .....

Name : NIK ZAINAB BINTI NIK AZIZAN

Date : 27 APRIL 2010

*Specially dedicate to mama, ayah, Feos, Akid and Ady. To my friends in Universiti  
Teknologi Malaysia especially to Ku Safirah, Kak Reni, Patrik, Meldi and all my  
friends session Disember 2009.*

## ACKNOWLEDGEMENT

Syukur Alhamdulillah, at last I had finished this thesis after one year struggle for it. Thanks to Allah S.W.T got giving me strength to do my thesis.

For my mother, father and family, thanks for encourage and support me through thick and thin. Thanks for being with me and motivate me whether I need it. Without all of you I will not be able to stand where I am today.

My thanks would also goes to my supervisor; Prof. Dr. Azlan Adnan who helping me along the way during my thesis progress. He is very helpful and understanding with a great ambitious to explore the earthquake engineering study. Thanks for supervised and guiding me through one year to finish this thesis. Thanks a lot for being a good supervisor.

To Ku Safirah and Mr. Zamri, thanks for constructive advice and supportive encouragement to finish this thesis. Thanks also for SEER members; Kak Reni, Patrik and Meldi who have provided the moral and spiritual support.

Finally to my friends; Ika, Maria, Nor, Ziah, Azie, Chaown, Jijah and K'on thanks for cooperation and encouragement. A lot of new things we had learnt together and that make we fit together!

## ABSTRACT

Response spectrum is a very useful tool in earthquake engineering for estimating the performance of structures. In this research, attenuation equation will be used to find the spectral acceleration of bedrock to predict reliable and more accurate ground motions as far 600 km from potential earthquake sources. According to historical records, the earthquakes that influenced Peninsular Malaysia are originated from two earthquake faults: the Sumatra subduction zone and Sumatra great fault zone. The worst earthquake ever occurred in Sumatra subduction zone is identified as  $M_w = 9.11$  and  $M_w = 7.81$  for Sumatra fault zone. These data were then used to predict the spectral acceleration of bedrock in Malaysia using Probabilistic Seismic Hazard Analysis (PSHA). The maximum response spectrum of bedrock from Sumatra subduction zone for megathrust is 67 gals, benioff is 60 gals and fault zone is 90 gals for site location in Kuala Lumpur while for Pulau Pinang the values of response spectrum from Sumatra subduction zone for megathrust is 57.5 gals, benioff is 47.78 gals and fault zone is 58.33 gals. Performance of building shows that the values of moment for combination load 2 increases about 15.07 percents for column 1 and approximately 4.70 percents for beam 2. Based on the results the performances of building during earthquake loadings are larger than without earthquake loading.

## ABSTRAK

Reaksi spektrum merupakan alat yang sangat berguna dalam kejuruteraan gempa untuk menganggarkan prestasi struktur. Dalam kajian ini, persamaan pengecilan akan digunakan untuk mencari percepatan spektral di batuan dasar untuk meramalkan gerakan tanah yang lebih tepat sejauh 600 km dari sumber gempa yang berpotensi. Menurut catatan sejarah, gempa bumi yang mempengaruhi Semenanjung Malaysia ini berasal dari dua sesar gempa iaitu di zon subduksi dan zon sesar Sumatera Sumatera. Gempa bumi terburuk yang pernah terjadi di zon subduksi Sumatera dikenalpasti sebagai  $M_w = 9.11$  dan  $M_w = 7.81$  untuk zon sesar Sumatera. Data-data ini kemudian digunakan untuk meramalkan percepatan spektrum di batuan dasar di Malaysia menggunakan analisis dengan kaedah kebarangkalian (PSHA). Reaksi spektrum maksimum di batuan dasar dari zon subduksi Sumatera megathrust adalah 67 Gals, Benioff / intraslab adalah 60 Gals dan zon sesar adalah 90 Gals untuk lokasi di Kuala Lumpur sedangkan untuk Pulau Pinang nilai reaksi spektrum dari zon subduksi Sumatera megathrust adalah 57.5 Gals , Benioff / intraslab adalah 47,78 Gals dan zon sesar adalah 58,33 Gals. Prestasi bangunan menunjukkan bahawa nilai momen untuk beban gabungan 2 meningkat sekitar 15.07 peratus untuk tiang 1 dan anggaran 4.70 persen untuk rasuk 2. Berdasarkan keputusan prestasi bangunan apabila beban gempa yang lebih besar daripada tanpa gempa.



## TABLE OF CONTANTS

CHAPTER	TITLE	PAGE
	<b>DECLARATION</b>	ii
	<b>DEDICATION</b>	iii
	<b>AKNOWLEDGEMENTS</b>	iv
	<b>ABSTRACT</b>	v
	<b>ABSTRAK</b>	vi
	<b>TABLE OF CONTENTS</b>	vii
	<b>LIST OF TABLES</b>	x
	<b>LIST OF FIGURES</b>	xi
	<b>LIST OF SYMBOLS</b>	xv
	<b>LIST OF APPENDICES</b>	xvi
<b>1</b>	<b>INTRODUCTION</b>	1
	1.1 Background	1
	1.2 Problem Statement	4
	1.3 Objective of the Study	4
	1.4 Scope of the Study	5
<b>2</b>	<b>LITERATURE REVIEW</b>	6
	2.1 The Approach for Seismic Hazard Analysis (SHA)	6

2.2	Previous Research on Earthquake in Malaysia	14
2.3	Historical Tremor in Peninsular Malaysia	23
<b>3</b>	<b>THEORETICAL BACKGROUND</b>	<b>27</b>
3.1	Introduction	27
3.2	Plate Tectonics	28
3.2.1	Sumatra Subduction	32
3.2.2	Sumatra Fault	33
3.3	Earthquake Size	34
3.3.1	Earthquake Intensity	34
3.3.2	Earthquake Magnitude	41
3.3.3	Earthquake Energy	46
3.4	Seismic Hazard Estimations	47
3.4.1	Observation Method	48
3.4.2	Statistical Method	48
3.4.3	Deterministic Seismic Hazard Estimation (DSHA)	48
3.4.4	Probabilistic Seismic Hazard Analysis (PSHA)	50
3.5	Attenuation Relationship	51
3.5.1	Petersen et al. (2004)	53
3.5.2	Azlan et al. (2005)	54
3.5.3	Campbell (2003)	55
3.5.4	Abrahamson & Silva (1997)	56
3.5.5	Young et. al. (1997)	58
3.5.6	Toro, Abrahamson & Schneider (1997)	59
<b>4</b>	<b>METHODOLOGY</b>	<b>61</b>
4.1	Collecting Data and Drawing	61
4.2	Collecting Attenuation Equation	65
4.3	Probabilistic Seismic Hazard Analysis (PSHA)	67

4.4	Finite Element Modelling (FEM)	74
<b>5</b>	<b>RESULTS AND ANALYSIS</b>	<b>75</b>
<b>6</b>	<b>CONCLUSION</b>	<b>94</b>
	<b>REFERENCES</b>	<b>96</b>
	<b>APPENDICES</b>	<b>99</b>

## LIST OF TABLES

NO TABLE	TITLE	PAGE
2.1	Strengths and limitations of Deterministic Seismic Hazard Assessment and Probabilistic Seismic Hazard Assessment (USACE, 1999)	11
3.1	The Rossi-Forel Intensity Scale	35
3.2	Modified Mercalli Intensity Scale	37
3.3	The European Macroseismic Scale	40
3.4	Relation between Richter Magnitudes and Earthquake Effects	42
3.5	Summary of attenuation functions	52
3.6	Coefficients of Attenuation Equations Derived by Young et al (1997)	59
4.1	Coordinate for earthquake sources and site locations	62
4.2	The distance of sources to site location and the depth of epicenter to sources	62
4.3	Table of several worldwide attenuation functions	66
4.4	Combination loads	74
5.1	Attenuation Equation	76
5.2	Maximum value for PGA	77
5.3	Results for Shear Force and Moment with different mechanisms, locations, loadings and capacity	81

## LIST OF FIGURES

NO	TABLE	TITLE	PAGE
1.1		Schematic of plate tectonic	2
1.2		Schematic illustration of wave propagation through engineering bedrock and soil surface	3
2.1		Dominance of deterministic and probabilistic approaches (McGuire, 2001a)	12
2.2		Maximum observed earthquake intensity in Peninsular Malaysia from 1805 to 1983 (from Malaysian Meteorological Service, 1994)	17
2.3		Maximum observed earthquake intensity in Sabah and Sarawak (1884–1983) (from Malaysian Meteorological Service, 1994)	18
2.4		Seismotectonic map of Peninsular Malaysia (JPKM, 1994)	18
2.5		Seismotectonic map of East Malaysia (JPKM, 1994)	19
2.6		Seismic hazard map in Continental Asia (Zhang, <i>et al.</i> , 1999)	20
2.7		Seismic hazard map around Northern Sumatra prepared by USGS-NEIC (2003)	21
2.8		Peak Ground Acceleration (PGA) contour based on deterministic method (Adnan <i>et al.</i> , 2002)	22

2.9	Slight tremor in Penang due to an earthquake on 22 January 2003 had caused panic among residents of the high-rise buildings	25
2.10	Cracks on one apartment in Gelang Patah, Johor Bahru after an earthquake on 25 July 2004	26
3.1	Tectonic setting around Peninsular Malaysia (Huchon and Le Pichon, 1984)	28
3.2	The major tectonic plates in the world (Kramer, 1996)	29
3.3	Interrelationship among spreading ridge, subduction zone, and transform fault plate boundaries (Kramer, 1996)	29
3.4	Illustration of several types of fault movement	31
3.5	Location of the four largest earthquakes in Sumatra subduction zone	33
3.6	Saturation of various magnitude scales: $M_w$ (moment magnitude), $M_L$ (Richter local magnitude), $M_s$ (surface wave magnitude), $m_b$ (short period body wave magnitude), $m_B$ (long-period body wave magnitude), and $M_{JMA}$ (Japanese Meteorological Agency magnitude). (After Idriss, 1985)	45
3.7	Relative energy of various natural and human-made phenomena	47
4.1	Location for subduction zone	63
4.2	Location for fault zone	63
4.3	Front view of building	64
4.4	Side view of building	64
4.5	Cross section view of building	65
4.6	The basic elements of Probabilistic Seismic Hazard Assessment	68
4.7	Illustration of conditional probability of exceeding a particular value of a ground motion parameter	69

	(Kramer, 1996)	
4.8	Examples of variations of source to site distance for different source zone geometries (Kramer, 1996)	72
5.1	Macrozonation map for the Peninsular Malaysia ( $T_R=500\text{year}$ )	77
5.2	Response Spectrum for Subduction (Megathrust) Location in Kuala Lumpur	78
5.3	Response Spectrum for Subduction (Megathrust) Location in Pulau Pinang	78
5.4	Response Spectrum for Subduction (Benioff) Location in Kuala Lumpur	79
5.5	Response Spectrum for Subduction (Benioff) Location in Pulau Pinang	79
5.6	Response Spectrum for fault zone Location in Kuala Lumpur	80
5.7	Response Spectrum for fault zone location in Pulau Pinang	80
5.8	Building of School	83
5.9	Dead Load Diagram	84
5.10	Live Load Diagram	84
5.11	Axial Force Combination Load 1	86
5.12	Axial Force Combination Load 2	86
5.13	Moment combination 1	87
5.14	Moment combination 2	87
5.15	Shear Force Combination 1	88
5.16	Shear Force combination load 2	88
5.17	Shear Force at columns for fault zone in Kuala Lumpur	89
5.18	Moment at columns for fault zone in Kuala Lumpur	90
5.19	Shear Force at beams for fault zone in Kuala Lumpur	90
5.20	Moment at beams for fault zone in Kuala Lumpur	91

5.21	Shear Force at columns for fault zone in Pulau Pinang	91
5.22	Moment at columns for fault zone in Pulau Pinang	92
5.23	Shear Force at beams for fault zone in Pulau Pinang	92
5.24	Moment at beams for fault zone in Pulau Pinang	93



**LIST OF SYMBOLS**

C	-	Coefficient
H	-	Depth
$k$	-	Stiffness
$m$	-	Mass
M	-	Earthquake magnitude
$M_b$	-	Body wave magnitude
$M_s$	-	Surface wave magnitude
$M_w$	-	Moment magnitude
N	-	North
PGA	-	Peak Ground Acceleration
$r_{rup}$	-	Closest distance to the zone of rupture
R	-	Source to site distance
S	-	South
$T_R$	-	Return Period
$\lambda_m$	-	Mean annual exceedance

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>	<b>PAGE</b>
A	Calculation For Probabilistic Seismic Hazard Analysis	99
B	Detailing Of Drawing For School Building	108
C	Calculation of Loadings	113
D	Calculation of Potential for School Building Structure	118

# CHAPTER 1


## INTRODUCTION

### 1.1 Background

An earthquake is the result of a sudden release of energy in the Earth's crust that creates seismic waves. Earthquakes are recorded with a seismometer, also known as a seismograph. The moment magnitude of an earthquake is conventionally reported, or the related and mostly obsolete Richter magnitude, with magnitude 3 or lower earthquake being mostly imperceptible and magnitude 7 causing serious damage over large areas.

At the earth's surface, earthquake manifests themselves by shaking and sometimes displacing the ground. When a large earthquake epicenter is located offshore, the seabed sometimes suffers sufficient displacement to cause a tsunami. The shaking in earthquakes can also trigger landslides and occasionally volcanic activity.

The major tectonic activity occurring in Malaysia surrounding Indonesia is due to the convergence of three major plates. The Eurasian, Pacific and Australian-Indian plates, along with some minor plates, are all actively moving towards each other in the Southeast Asia region (Figure 1.1). The Indian Ocean floor is sliding to the north under the islands of Java and Sumatra, resulting in a large subduction zone. Most earthquake events within Indonesia occur in the Sunda subduction system. Seismic events of the Sunda system are concentrated at shallow depths mostly above 30km.

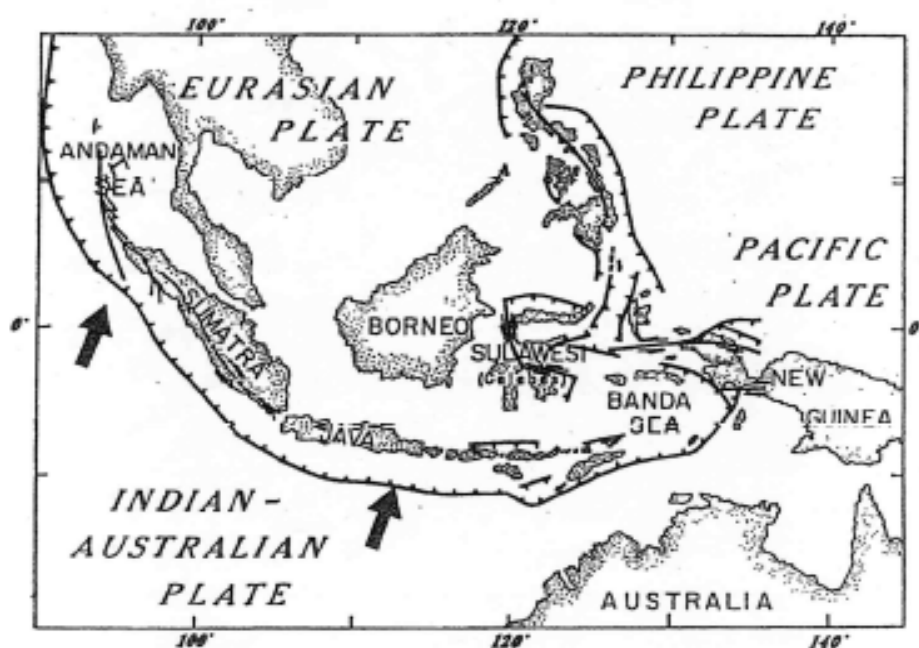


**Figure 1.1** Schematic of plate tectonic

Peninsular Malaysia is located on a stable part of the Eurasian Plate, buildings on soft soil are occasionally subjected to tremors due to far-field effects of earthquake in Sumatra (Balendra et al. 1990). In the last few years, tremors were felt several times in tall buildings in Kuala Lumpur due to large earthquake in Sumatra. The mechanism for such tremors is illustrated in Figure 1.2.

The seismic waves, generated from an earthquake in Sumatra, travel long distance before they reach Malaysia bedrock. The high frequency earthquake waves damped out rapidly in the propagation while the low frequency or long period waves are more robust to energy dissipation and as a result they travel long distances.

Thus the seismic waves reaching the bedrock of Malaysia Peninsula is rich in long period waves, and significantly amplified due to resonance when they propagate upward through the soft soil sites with a period close to the predominant period of the seismic waves. The amplified waves cause resonance in buildings with a natural period close to the period of the site, and the resulting motions of buildings are large enough to be felt by the residence.

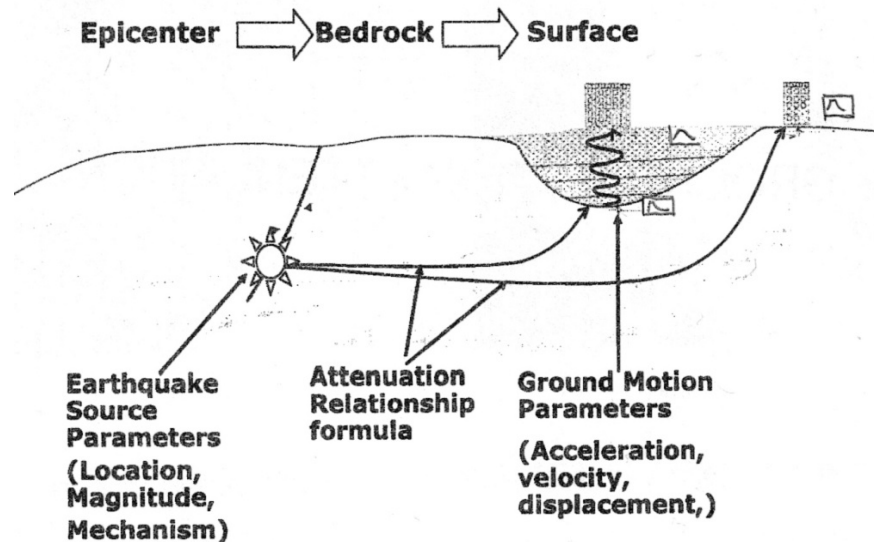

**Figure 1.2** Schematic illustration of wave propagation through engineering bedrock and soil surface

## **1.2 Problem Statement**

The magnitude of ground motion at varying distance from the Sumatra earthquake sources is determined from attenuation models. Statistical regression analysis could be used to develop such attenuation models (Youngs 1997, Sadigh 1997; Petersen et al. 2004; Azlan et al. 2005; Campbell 2004). However, as there were not enough strong motion data in this region relating the ground acceleration with magnitude and distance, this conventional empirical modeling approach was not feasible.

The bedrock motions can be significantly amplified when the natural period of the soft soil is close to the predominant natural period of the bedrock motions, and can be further enlarged if the building possesses a natural period which is close to the natural period of the site. For this research to find out natural period and performance of the building with different mechanism and fault distances.

## **1.3 Objective of the Study**

The objectives of the research are:

- To identify suitable attenuation equation.
- To find response spectrum of bedrock.
- To find performance of building with different response spectrum.

## **1.4 Scope of the Study**

The scope of research would cover as mention below:

- Performance of attenuation equation with different mechanisms and fault distance
- Performance of PGA and response spectrum of bedrock.
- Performance of building with different response spectrum